


MODEL UV SG SG3000T36
Professional Commercial UV Ozone Generator

USES:

The ProMedUSA UV SG3000T36 series ozone generators are designed for use as very high output commercial odour treatment tools. They are ideal for use in bin centres, hotel housekeeping, stewarding, F&B, restoration use, mold remediation, AHU's and FC's, malls, airports, medical centres, clinics and for air sanitization (ozone kills germs, viruses including H1N1, HFMD, E.Coli, Salmonella, MSRA, Staph, etc.).

They are exclusively made in Canada for ProMedUSA with the highest quality components to extremely rigorous standards. Our UV generating tubes are made in the United States exclusively for us.

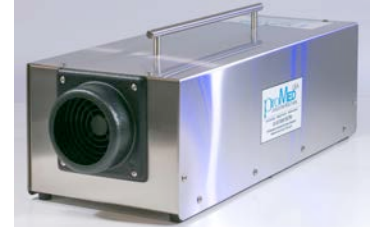

OZONE GENERATION METHOD:

High Output, Hi-Efficiency Ultra Long Life American made UV Tubes

OZONE OUTPUT:

600 to 3000 MG/HR in 7 selectable levels with rear panel switches

EFFECTIVENESS:

The SG3000 can easily freshen up to 350 M³ in about 10-20 minutes
The SG3000 can easily freshen up to 775 M³ in about 20-40 minutes
The SG3000 can easily freshen up to 11,100 M³ in about 1-2 hours

CONTROLS:

On/Off switch, Standard LED 9 position electronic timer (Always on, 10 min, 30 min, 1,2,4,8,12,18 and 36 hours); 3 rear switches to select ozone output levels from 600 MG/HR to 4200 MG/HR

DIMENSIONS and WEIGHT:

61 cm Long X 23 cm Wide X 18 cm High. Weight 8 KG

CONSTRUCTION:

Beautiful 18 gauge brushed Stainless Steel

ELECTRICAL:

220-240V 50HZ, 2 amp; 110-120VAC 60hz is also available

UV TUBE LIFE EXPECTANCY and REPLACEMENT COST:

Generally 2-3 years of continuous use. Replacement tube cost is only \$150 per tube

MAINTENANCE:


Minimal – just clean the rear filter usually every 1-2 months, wipe the UV tubes clean several times per year. Entire process takes only 10 minutes or less

WARRANTY:

The UV SG3000T36 is FULLY GUARANTEED INTERNATIONALLY against defects in materials and workmanship for 6 YEARS. Our made in USA UV

UV SG3000 SERIES PROFESSIONAL PORTABLE OZONE GENERATOR

Exclusively manufactured in Canada for ProMedUSA!

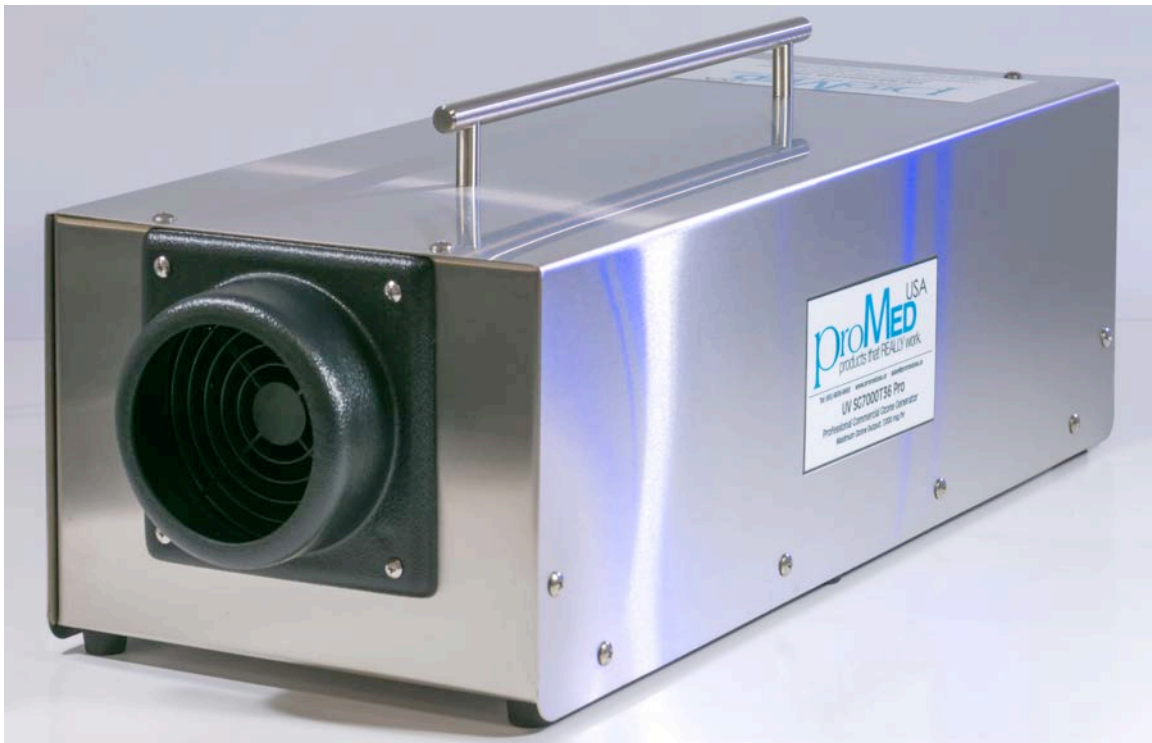

- **OZONE OUTPUT:** 600 to 3000 MG/HR (ADJUSTABLE WITH REAR SWITCHES IN 7 OZONE LEVELS)
- **DIMENSIONS:** 60 CM X 23 CM X 18 CM; WEIGHT: 8.5 KG
- **POWER:** 220-240VAC 50Hz, 2 Amp
- **CONSTRUCTION:** 18 GAUGE BRUSHED 316 STAINLESS STEEL
- **UNIT WARRANTY:** 6 YEAR INTERNATIONAL WARRANTY
- **TUBE WARRANTY:** 2 YEAR WARRANTY ON THE MADE IN USA UV TUBES
- **PERFORMANCE:** EASILY REMOVE ODOURS IN A 350 M³ SPACE IN JUST 10-15 MINUTES; 11,100 M³ SPACE IN ABOUT 1-2 HOURS