



(Can be wall or floor mounted as desired)

ProMedUSA Model SG-CDS-2TAP Ozonated Water Generator

Applications

- ✓ Food Preparation Areas
- ✓ Vegetable washer integration
- ✓ Salad preparation
- ✓ Sashimi section
- ✓ General surface wash & sanitation
- ✓ Display areas
- ✓ Fish processing station
- ✓ Hand wash stations






Camden BRI **SGS**

Specification

Model SG-CDS-2TAP

Ozonated Water Output	
# of Faucet Supply	2 pcs
Flow Rate	100 - 4000 LPH (0.4-17.7 GPM)
Concentration	4.0 ppm@100LPH 0.10 ppm@4000LPH
Output Pressure	≤ Input water pressure (max. 3kg/cm ² or 42.7 psi)
Operating Requirements	
Power Supply	□ 100 ~ 120V , 50/60 Hz □ 200 ~ 240V , 50/60 Hz
IP Code	IPX2
Input Water Quality	Municipal Water Source
Temperature	5 - 30 °C (41 - 86 °F)
Pressure	2.0 - 4.0 kg/cm ² (29 - 57 psi)
Pipe Diameter	1"
Room Temperature	5 - 35 °C (41 - 95 °F)
Room Conditions	Well Ventilated Environment

Dimension

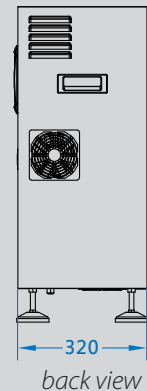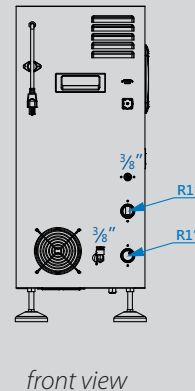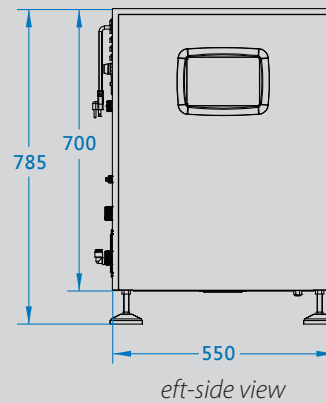

Design Parameters

Depth (D)	320 mm (12.6 in)
Width (W)	550 mm (21.7 in)
Height(H)	785 mm (30.9 in)
Net Weight	50 kg (110 lb)
Power Consumption	700/900 W
Material Casing	Stainless Steel (SUS304)

Applications	Conc.	Flow Rate
High Protein Products	4.0 ppm	100 LPH (0.4 GPM)
General Terminal Santizing	3.7 ppm	120 LPH (0.53 GPM)
General Direct Food Contact	2.0 ppm	200 LPH (0.88 GPM)
General Surface Disinfection	1.0 ppm	380 LPH (1.67 GPM)
Water Disinfection	0.5 ppm	750 LPH (3.30 GPM)